

Republic of the Philippines

Department of Agriculture

Philippine Center for Posthary

Philippine Center for Postharvest Development and Mechanization

Science City of Muñoz, Nueva Ecija

www.philmech.gov.ph

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 CERTIFIED







### BIDS AND AWARDS COMMITTEE

## SUPPLEMENTAL BID BULLETIN NO. 1

SUPPLY OF LABOR AND MATERIALS FOR THE DESIGN, FABRICATION, DELIVERY AND ON-SITE INSTALLATION, TESTING AND COMMISSIONING OF EQUIPMENT AND MACHINERIES FOR COCONUT COIR AND PEAT PROCESSING CENTER (PHilMech-Goods-23-07-15)

This **Supplemental/Bid Bulletin No. 1** is being issued to clarify, amend and supplement provisions in the Bidding Documents.

## A. ISSUES AND CONCERNS DURING THE PRE-BID CONFERENCE

Action Taken/Repl	y: Request/proposal is granted. Similar figu	re is hereby attached as Annex A
2. Issue / Propos	al: Request that the material for the hulling cart	t be GI sheet instead of steel frame
<i>Асцоп Такеп/Кер</i> [	y: The material requirement for hauling cart	remains to be stainless steel frames.
	BEFORE	AFTER
Technical Specifications	3) 6 units Hauling Cart  - Materials: stainless steel frames	3) 6 units Hauling Cart Materials: stainless steel frames; ss 304
3. Issue / Propose	al: Request for the provision of more details for r	motorized twining machine
Action Taken/Reply	: Technical specification is retained.	
4. Issue / Propos design could be	al: Inquiry if the project design should be a PCA e acceptable.	A accredited design or any manufacturer
Action Taken/Reply design is acceptab	v: The design has no specific requirement. le as long as it conforms to the requirements	Either PCA or private manufacturer

Main Office:

CLSU, Science City of Muñoz, Nueva Ecija, Philippines Mobile Nos.: (+63) 917-800-4526/ (+63) 917-813-0852

Liaison Office: 3rd Floor, ATI Bldg., Elliptical Road, Diliman, Quezon City



### Republic of the Philippines Department of Agriculture

# Philippine Center for Postharvest Development and Mechanization

Science City of Muñoz, Nueva Ecija

www.philmech.gov.ph

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 CERTIFIED







Action Taken/Reply: Re	equirement for "23KV" is deleted in the t	ion of the transformer. ransformer specifications
, , ,		
	BEFORE	AFTER
Technical Specification	3 sets Transformer  - Transformer Pole Type, 50 KVA, 23KV, 3Phase, Cu-cu Winding	3 sets Transformer  - Transformer Pole Type, 50 KV, 3Phase, Cu-cu Winding
6. Issue / Proposal: F Action Taken/Reply:	Request for a detailed list of manufacturer's	standard tools requirement.
	BEFORE	AFTER
Technical Specification	With 1 set of manufacturer's standard tools, Heavy Duty Toolbox and accessories required for maintenance	Standard heavy duty tools and accessories: made of tempered steel and chrome vanadium namely:  - Adjustable wrench, 300mm minimum - Grease gun, 250mm cylinder length, minimum - One (1) set combination wrench (open and box, 10 pcs-size appropriate to the equipment for coco coir and peat) - Screwdriver: Philips and flat head 300mm, minimum - Heavy duty toolbox and roll-up tools holder * Size that could accommodate the required tools
	equest that the payment terms be per systen	
Action Taken/Reply: Red	quest /proposal is partially granted. Paymer	nt terms is amended
	BEFORE	AFTER
Special Conditions of the Contract (GCC Clause 2.2)	The terms of payment shall be as follows:  a) One Hundred percent (100%) of the Contract Price: upon One Hundred Percent (100%)	The terms of payment shall be as follows:  a) One Hundred percent (100%) of the Contract Price: upon One Hundred Percent (100%)

Main Office:

CLSU, Science City of Muñoz, Nueva Ecija, Philippines Mobile Nos.: (+63) 917-800-4526/ (+63) 917-813-0852

Liaison Office: 3rd Floor, ATI Bldg., Elliptical Road, Diliman, Quezon City



### Republic of the Philippines Department of Agriculture

# Philippine Center for Postharvest Development and Mechanization

Science City of Muñoz, Nueva Ecija

www.philmech.gov.ph

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 CERTIFIED



completion of the project and submission of required documents.

completion of the project and submission of required documents.

# In case of unavailability of the building the following term applies:

- b) Fifty percent (50%) of the Contract Price: upon delivery of the complete components/equipment and initial inspection of the authorized representatives of PHilMech; and
- c) Remaining Fifty percent (50%) of the Contract Price: upon 100% completion of the project and final inspection and acceptance.
- 8. Issue / Proposal: Request for the extension of the delivery period.
  Action Taken/Reply: The ninety (90) calendar day delivery period is retained.
- Issue / Proposal: Inquiry if the supplier could provide generator set in order for the project to be completed in case there would be a delay in the processing of electrical requirements by the cooperatives counterpart.

Action Taken/Reply: Yes. The bidder is allowed to provide generator set for testing purposes

10. Issue / Proposal: Inquiry on who will be providing the raw materials for testing. Action Taken/Reply: **PHilMech will be providing the samples for testing** 

11. Issue / Proposal: Inquiry if the bidder is allowed to only participate in items 1 and 4
Action Taken/Reply: No. The bidding project is a single contract lot, so all components must be supplied

12. Issue / Proposal: Inquiry on the reckoning of the one (1) year warranty requirement

Main Office:

CLSU, Science City of Muñoz, Nueva Ecija, Philippines Mobile Nos.: (+63) 917-800-4526/ (+63) 917-813-0852

Liaison Office: 3rd Floor, ATI Bldg., Elliptical Road, Diliman, Quezon City



## Republic of the Philippines Department of Agriculture

## Philippine Center for Postharvest Development and Mechanization

Science City of Muñoz, Nueva Ecija

www.philmech.gov.ph

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 CERTIFIED







Action Taken/Reply: The one (1) year warranty requirement will start from the day the machine has been tested and accepted by the TPI.

Issued this 21 day of July 2023 in the Science City of Muñoz, Nueva Ecija, Philippines.

Reviewed and approved by:	
	C. SANTIAGO, Ph.D. ds and Awards Committee
ARLENE C. JOAQUIN Vice Chairperson	JERRY F AVELLANOXA Regular Member
DONALD V. MATEO Technical Member	ANDRESM/TUATES JR. Ph.D. End-User/Pyovisional Member
CONFORMED: Bidders Name: Date Received:	

Main Office:

CLSU, Science City of Muñoz, Nueva Ecija, Philippines

Mobile Nos.: (+63) 917-800-4526/ (+63) 917-813-0852

Liaison Office: 3rd Floor, ATI Bldg., Elliptical Road, Diliman, Quezon City



### Republic of the Philippines Department of Agriculture

## Philippine Center for Postharvest Development and Mechanization

Science City of Muñoz, Nueva Ecija


www.philmech.gov.ph ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 CERTIFIED







### ANNEX A.

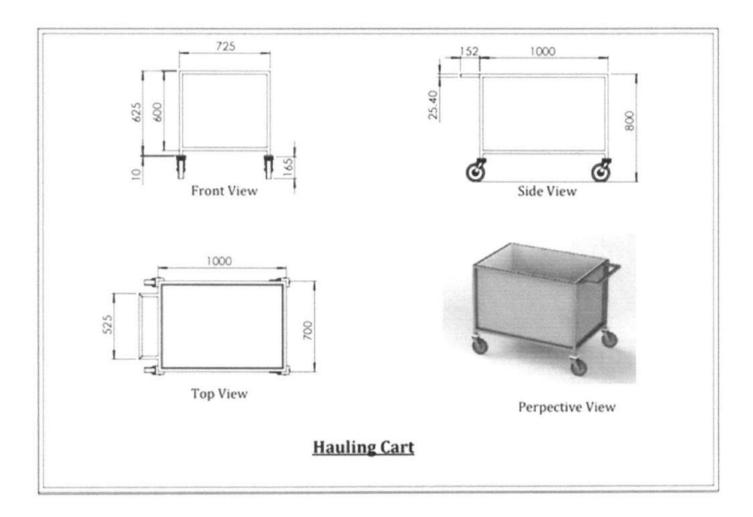

Main Office:

CLSU, Science City of Muñoz, Nueva Ecija, Philippines Mobile Nos.: (+63) 917-800-4526/ (+63) 917-813-0852

Liaison Office: 3rd Floor, ATI Bldg., Elliptical Road, Diliman, Quezon City